

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : G06K 19/077		A1	(11) International Publication Number: WO 90/08365
			(43) International Publication Date: 26 July 1990 (26.07.90)
(21) International Application Number: PCT/GB90/00081		(81) Designated States: AU, CA, JP, KR, US.	
(22) International Filing Date: 18 January 1990 (18.01.90)		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(30) Priority data: 8901189.4 19 January 1989 (19.01.89) GB			
(71) Applicant (for all designated States except US): W. & T. AV- ERY LIMITED [GB/GB]; Smethwick, Warley, West Midlands B66 2LP (GB).			
(72) Inventor; and (75) Inventor/Applicant (for US only) : JARVIS, Charles, Ri- chard [GB/GB]; 12 Acacia Avenue, Bewdley, Worcs (GB).			
(74) Agent: HYDEN, Martin, Douglas; GEC plc Patent De- partment, GEC-Marconi Research Centre, West Han- ningfield Road, Great Baddow, Essex CM2 8HN (GB).			

(54) Title: **PORTABLE ELECTRONIC TOKEN**

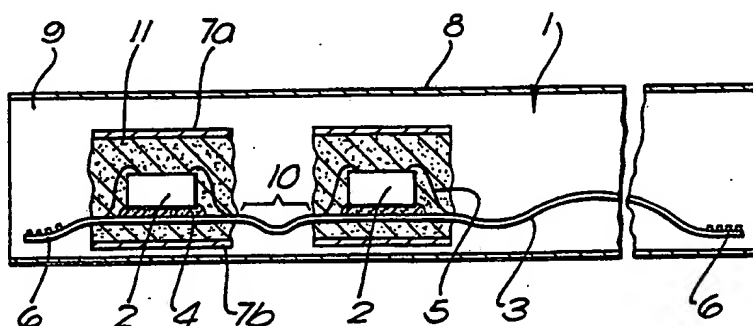

(57) Abstract

In order to allow a thin portable token of the Smart Card type to be flexible, yet protect the electronic components (2) within it, the token is manufactured from a resin material and includes high tensile foil inserts (7a, 7b) above and below the component, producing a double skinned effect to stiffen and strengthen the token in the region of the component. The components are mounted on a substrate (3), which also acts as a hinge between components to enable flexing of the token as a whole. Alternative comprise frames (15) encircling each component (2) or moulded resin members (11) encapsulating the components (2).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MR	Mauritania
BE	Belgium	GA	Gabon	MW	Malawi
BF	Burkina Faso	GB	United Kingdom	NL	Netherlands
BG	Bulgaria	HU	Hungary	NO	Norway
BJ	Benin	IT	Italy	RO	Romania
BR	Brazil	JP	Japan	SD	Sudan
CA	Canada	KP	Democratic People's Republic of Korea	SE	Sweden
CF	Central African Republic	KR	Republic of Korea	SN	Senegal
CG	Congo	LI	Liechtenstein	SU	Soviet Union
CH	Switzerland	LK	Sri Lanka	TD	Chad
CM	Cameroon	LU	Luxembourg	TG	Togo
DE	Germany, Federal Republic of	MC	Monaco	US	United States of America
DK	Denmark				

- 1 -

PORTABLE ELECTRONIC TOKEN

INDUSTRIAL APPLICABILITY

This invention relates to a portable electronic token and in particular it relates to a portable token of credit card sized dimensions and containing electronic circuits for data storage and processing. Such a token is commonly termed a "Smart Card" or "integrated circuit card".

TECHNICAL FIELD

A Smart Card generally comprises one or more components such as integrated circuits mounted on a substrate and encapsulated within a plastics material or laminate of credit card sized dimensions, typically 8.5 x 5.4 x 0.075 cms. It is important that such cards are flexible so that they can be placed in the users pocket, wallet or purse and be capable of withstanding bending forces. Furthermore is a card is to be compatible with present day systems it must include a magnetic strip and meet with the flexing requirements imposed upon cards to be used in cash dispensing machines, which are governed by ISO standards.

- 2 -

BACKGROUND ART

It has been previously proposed to provide a contact-type smart card structure which protects the components, either by mounting them on a metal foil and encapsulating them in a hard resin as described in EP0068539A, or by providing a box-like structure of a plastics material within the token which encloses the components as described in US 4755661.

The present invention seeks to provide an alternative structure which is particularly applicable to contactless smart cards.

DISCLOSURE OF INVENTION

According to the present invention there is provided a portable electronic token comprising a plurality of discrete components encapsulated in a plastics material and at least one respective high tensile member associated with each component and disposed such that a region of the token encompassing the component is substantially constrained from flexing, the components being mounted on a flexible substrate which extends between the components so as to form resilient hinge portions between adjacent components.

- 3 -

In a particularly preferred embodiment, the token comprises a pair of face members defining opposite surfaces of the token and the flexible substrate is disposed between said members. The token is typically a "contactless" Smart Card, that is information is passed to and from the card by inductive coupling such that no direct electrical contact is needed between the components and the surface members.

The face members of, for example, polycarbonate act as strengthening skins and may also act as labels for the token.

In one preferred embodiment two high tensile members are provided which are associated with each component, in which case one may be provided above the component and a complementary one below the component, where above and below are terms denoting the relative position of the member with respect to the substrate. The second member may be integral with the substrate or may be an extra component.

The high tensile members are advantageously made of a metal foil such as nickel, stainless steel or high tensile steel.

SUBSTITUTE SHEET

- 4 -

In an alternative embodiment of the invention, the high tensile member substantially encircles the component and is conveniently in the form of a circular or square plate having an aperture therein into which the component projects.

In any of the embodiment described above, the reinforcing effect of the high tensile member or members can be supplemented by providing a hard resin around the component. However, in a yet further embodiment of the invention, the resin can constitute the or each high tensile member, the resin being moulded directly onto the component.

BRIEF DESCRIPTION OF DRAWINGS

The present invention will now be described, by way of example with reference to the accompanying drawings, in which Figures 1, 2 and 3 show diagrammatic side views of alternative embodiments of the present invention.

MODES FOR CARRYING OUT THE INVENTION

Referring now to the drawings, Figure 1 shows a portable token 1 of credit card sized dimensions. The card comprises a plurality of electronic components 2 such as

SUBSTITUTE SHEET

- 5 -

integrated circuits. The circuits will generally include microprocessing and memory functions and are mounted upon a flexible substrate 3 which may be a polyimide or polyester. The components 2 are mounted upon the substrate by a bonding material 4 and connected by further bonds 5 to electronic interconnections on the substrate (not shown). The card shown is one of the contactless coupling type and includes an inductive loop 6 mounted towards its periphery, for receiving power and transmitting and receiving data signals.

Complementary pairs of foils 7a and 7b are provided above and below components 2. These foils are made of a material such as nickel or stainless steel but can be of any material provided it has good tensile properties. The region between the foils is filled with a hard glob top resin material 11 such as an epoxy resin or a silicon resin which reduces shear between the foils, is ionically clean and thermally conductive. One or more labels 8 may be provided on the surfaces of the card. The labels may be of polycarbonate and can be skins which, together with the plastics material between them serve to produce a strong but flexible card. The card is manufactured either by a lamination process as is well known in the art or by means of an injection moulding process in which a suitable fluid plastics material is applied to a mould which already

- 6 -

contains the components, substrate and labels and then allowed to harden.

It is thus seen that the structure of the card around each component and, if the labels are of suitable material, of the card as a whole is equivalent to that of a double skinned hull commonly used in boat building and in aircraft structures. The combination of the foils 7a and 7b and resin material between them act to stiffen and strengthen the card around the region of each component and thus prevent this region from flexing, which could be potentially disastrous to the circuits or electrical connections. Flexing is however allowed of those portions of the card not surrounding the components, such as the region 10 in the figure. The portion of the substrate 3 in this region accordingly acts as a hinge when the card flexes. Thus a card embodying the invention can be manufactured, which card is flexible enough to withstand bending when carried by a user, or in operation, but protects, and holds rigid the region surrounding, each component.

The embodiment shown in Figure 2 includes the same reference numerals as used in Figure 1 for like parts and differs in that the pair of foils 7a, 7b is replaced by a frame 15 made of high tensile steel which encircle the

SUBSTITUTE SHEET

- 7 -

component 2 and are attached to the substrate 3 by glob top resin 11 which also extends over the component 2 to assist in protection. The frame 15 can be square, circular or any other suitable shape although circular is preferred as there are no sharp corners which might puncture the skin and label 8.

The further embodiment shown in Figure 3 differs from those shown in Figures 1 and 2 in that the glob top resin 11 is moulded to form a strengthening member without the need for metal foils or frames. The resin 11 is moulded directly onto the component and substrate and so is easily reproducible.

The constructions described herein are particularly useful for contactless smart cards as no contacts are required with the surface layer. Consequently, the substrate/component layer can be manufactured with the reinforcement in place as the position of the substrate between the skins 8 is not critical as it is in a contact-type card where surface contacts are required.

The card as a whole is likely to be subject to considerable deformation in use. The combination of the labels on opposing faces serves to preserve the integrity of

SUBSTITUTE SHEET

- 8 -

the structure and significantly reduces the likelihood of the reinforced regions around the or each component 'breaking out' of the structure.

Changes can be made while remaining within the scope of the invention.

- 9 -

CLAIMS

1. A portable electronic token comprising a plurality of discrete components encapsulated in a plastics material and at least one respective high tensile member associated with each component and disposed such that a region of the token encompassing the component is substantially constrained from flexing, the components being mounted on a flexible substrate which extends between the components so as to form resilient hinge portions between adjacent components.

2. A token as claimed in claim 1 which comprises a pair of face members defining opposite surfaces of the token, the flexible substrate being disposed therebetween.

3. A token as claimed in claim 2 wherein the face members are of polycarbonate or polyester.

4. A token as claimed in Claim 1 wherein tensile members are associated with each component, in respective dispositions above and below the component and substrate.

5. A token as claimed in Claim 4 wherein one of the tensile members associated with each component is integral

SUBSTITUTE SHEET

- 10 -

with the substrate.

6. A token as claimed in claim 1, wherein a tensile member substantially encircles each component.

7. A token as claimed in claim 6 wherein the tensile member is a circular or polygonal plate having an aperture therein.

8. A token as claimed in claim 1 wherein each component is encapsulated in a hard glob top resin material.

9. A token as claimed in claim 1 wherein the tensile members are metal foils.

10. A token as claimed in claim 9 wherein the foils are of nickel, stainless steel or high tensile steel.

11. A token as claimed in claim 1, wherein the tensile member is formed from a hard moulded resin.

12. A token as claimed in claim 11, wherein the resin is moulded directly onto the substrate.

13. A token as claimed in claim 11 wherein the resin

SUBSTITUTE SHEET

- 11 -

is a glob top resin.

14. A token as claimed in claim 1 including processing means, memory means, and inductive input/output means, for interacting with an external read/write unit to transmit and receive data.

15. A token as claimed in claim 7 of dimensions substantially 8.5 x 5.4 x 0.075 cm and having an overall flexible nature.

16. A token as claimed in claim 3 wherein the face members act as labels.

17. A token as claimed in claim 16 wherein the graphic image of the label is on the inner surface of the face members.

1/1

FIG. 1

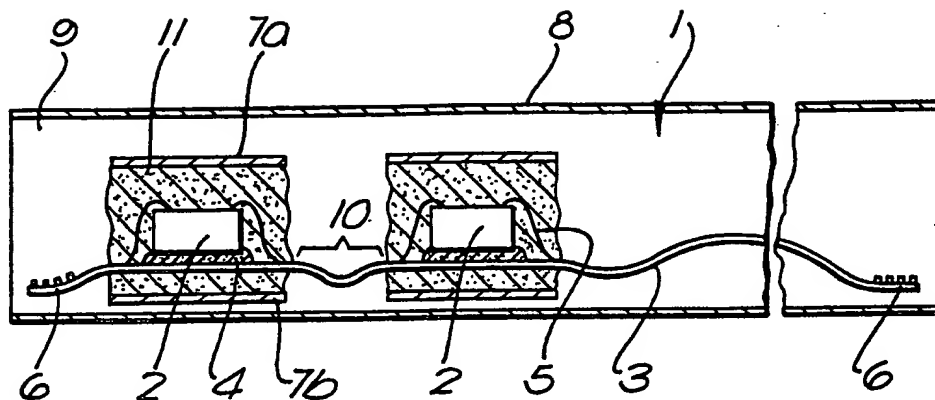


FIG. 2


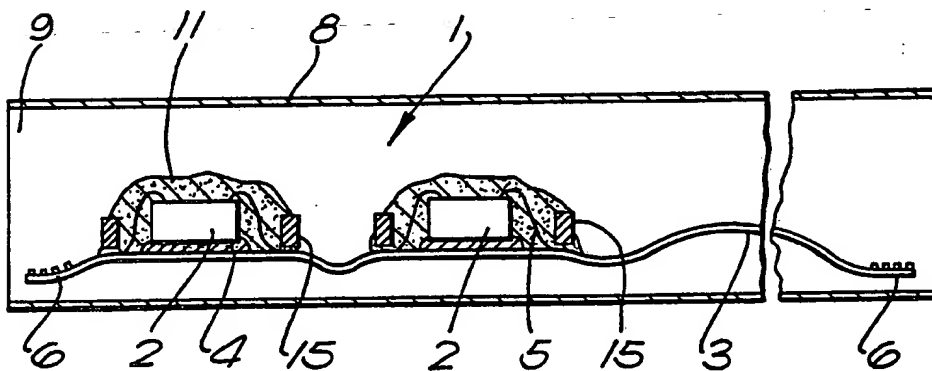


FIG. 3

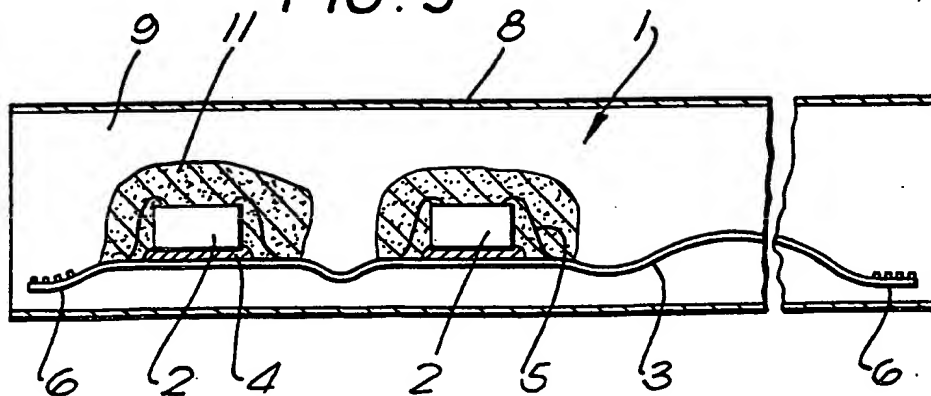

INTERNATIONAL SEARCH REPORT

PCT/GB 90/00081

International Application No

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC: <div style="display: flex; justify-content: space-between;"> Int.Cl. 5 G06K19/077 </div>		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	G06K	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claims No. ¹³
X	PATENT ABSTRACTS OF JAPAN vol. 11, no. 45 (P-546)(2492) 10 February 1987, & JP-A-61 214086 (HITACHI MAXELL) 22 September 1986, see the whole document	1
Y	--- EP,A,189039 (HEGI P.) 30 July 1986 see page 2, line 25 - page 5, line 12; claim 1; figures 1-3	2, 4-12, 14
Y	--- PATENT ABSTRACTS OF JAPAN vol. 11, no. 35 (P-542)(2482) 3 February 1987, & JP-A-61 204788 (DAINIPPON PRINTING) 10 September 1986, see the whole document	2, 6
Y	--- PATENT ABSTRACTS OF JAPAN vol. 11, no. 35 (P-542)(2482) 3 February 1987, & JP-A-61 204788 (DAINIPPON PRINTING) 10 September 1986, see the whole document	4-7
-/-		
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>¹⁰ Special categories of cited documents : 10</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search <div style="text-align: center;">15 JUNE 1990</div>	Date of Mailing of this International Search Report <div style="text-align: center;">- 3. 07. 90</div>	
International Searching Authority <div style="text-align: center;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="text-align: center;">GYSEN L.A.D. </div>	

III DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		Relevant to Claim No.
Category *	Citation of Document, with indication, where appropriate, of the relevant passages	
Y	PATENT ABSTRACTS OF JAPAN vol. 7, no. 168 (P-212)(1313) 23 July 1983, & JP-A-58 75285 (TOUKIYOU JIKI INSATSU) 6 May 1983, see the whole document	14
Y	PATENT ABSTRACTS OF JAPAN vol. 8, no. 59 (E-232)(1496) 17 March 1984, & JP-A-58 210646 (KIYODOU INSATSU) 7 December 1983, see the whole document	11-12
Y	EP,A,231937 (HITACHI MAXELL) 12 August 1987 see page 4, lines 1 - 55; figures 3, 8-10	6-10
A	EP,A,19280 (GAO GESELLSCHAFT FUR AUTOMATION UND ORGANISATION) 26 November 1980 see page 6, lines 16 - 25; figures 1-3	16
A	FR,A,2439438 (CII-HONEYWELL BULL) 16 May 1980 see page 4, line 18 - page 10, line 15; claims 8-9; figures 1-3, 5, 7-8	1, 6
A	PATENT ABSTRACTS OF JAPAN vol. 10, no. 274 (P-498)(2330) 18 September 1986, & JP-A-61 95486 (HITACHI) 14 May 1986, see the whole document	1, 5
A	PATENT ABSTRACTS OF JAPAN vol. 10, no. 260 (P-494)(2316) 5 September 1986, & JP-A-61 86887 (TOSHIBA) 2 May 1986, see the whole document	1

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

PCT/GB 90/00081
SA 33685

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15/06/90

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-189039	30-07-86	CH-A- 661808	14-08-87
		US-A- 4733061	22-03-88
EP-A-231937	12-08-87	JP-A- 62183151	11-08-87
EP-A-19280	26-11-80	DE-B- 2920012	20-11-80
		AT-T- E9516	15-10-84
		JP-A- 56026451	14-03-81
		US-A- 4417413	29-11-83
FR-A-2439438	16-05-80	DE-A- 2942397	30-04-80
		GB-A- 2047474	26-11-80
		JP-A- 55056639	25-04-80
		NL-A- 7905298	22-04-80
		SE-A- 7906961	20-04-80

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.